

PSA Oxygen Generator

AS-B



AirSep Alpha Series Oxygen Generators produce from 20 to 5,500 cubic feet of oxygen per hour at up to 95% oxygen concentration. When electricity and a source of compressed air is supplied, these dependable machines can provide oxygen for practically any application.

Features

- Produces oxygen from an independent compressed air source
- Microprocessor controlled
- Low operating cost
- Automatic and unattended operation
- Easy to install and maintain

Typical Applications


- Cutting/Brazing/Soldering
- Environmental Remediation
- Fish Farming
- Glass Work/Blowing
- Ozone (Generator) Feed Gas
- Thermal/Chemical Oxidation
- Waste/Water Treatment

Specifications

Product Flow	45 – 55 SCFH (1.18 – 1.45 Nm ³ /hr or 21 – 25 SLPM) ¹
Product Pressure	45 – 55 psig (310 – 379 kPa or 3.0 – 3.7 barg) ¹
Product Concentration	Up to 95%
Product Dew Point	-100°F (-73°C)
Dimensions (W x D x H) (Nominal)	17 x 15 x 58 in (43 x 38 x 147 cm)
Weight	246 lb (112 kg)
Physical Connections ²	
Compressed Air Inlet	¼" FNPT
Product Gas Outlet	¼" FNPT
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 104°F (40°C)
Storage	
Temperature	-13°F (-25°C) to 131°F (55°C)
Humidity	0-90% (non-condensing)
Feed Air Requirements	Flow Rate: <i>Refer to chart on reverse page.</i> Clean and Dry "Plant Air" (Class 5.6.4 per ISO 8573.1) Pressure: 90 psig (621 kPa or 6.2 barg) minimum Temperature: 122°F (50°C) maximum
Control Power Requirements (Single Phase)	120 V ~ ±10%, 50/60 Hz, 1.0 A or 220 V ~ ±10%, 50/60 Hz, 0.5 A
NRTL Certifications and Approvals	CAN/CSA-C22.2 No. 61010-1-12, ANSI/UL Std. No. 61010-1:2012 (for 120 V configurations only)
60 Gallon Oxygen Receiver	
Dimensions (Dia. x H)	26 x 52 in (65 x 131 cm)
Weight	159 lb (72 kg)


¹ SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F (21°C) / Nm³ (Normal cubic meter) gas measured at 1 atmosphere and 32°F (0°C) / SLPM (Standard liters per minute) gas measured at 1 atmosphere and 70°F (21°C)

² Hose and applicable adapters included with optional Factory-supplied accessory kits.

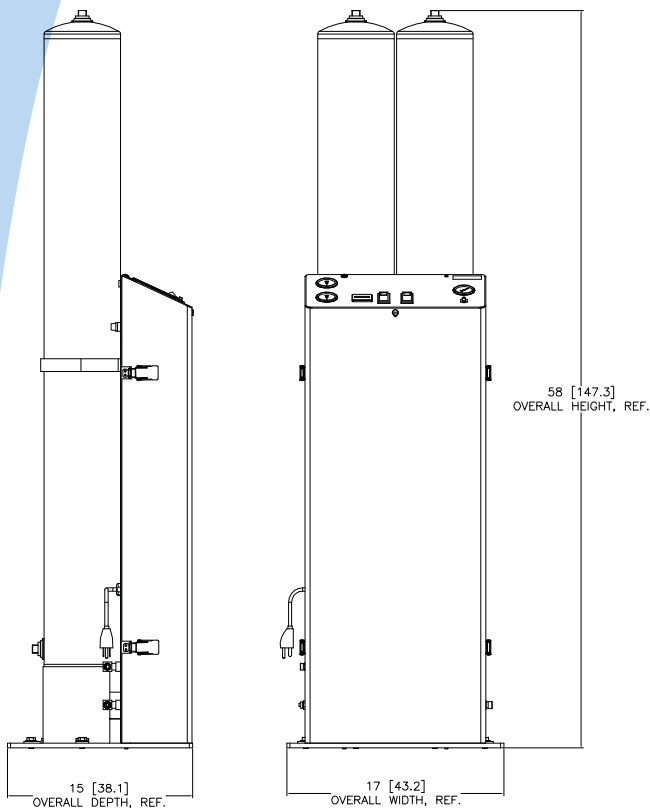

Note: All dimensions are nominal.

Model AS-B Oxygen Generator Feed Air Requirement**

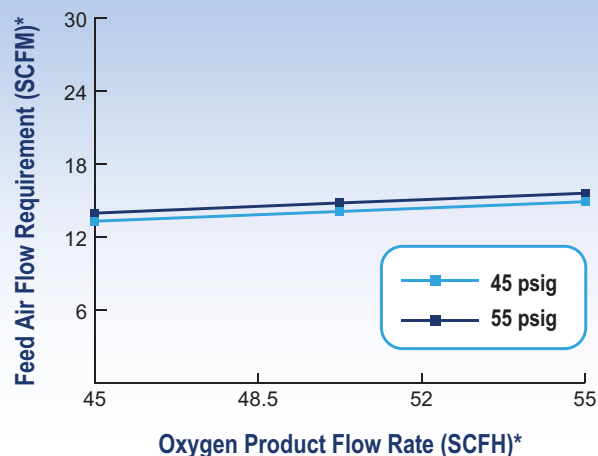

* SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F

**Time weighted average. Contact Factory for air compressor sizing assistance.

Ordering Information

Model	Part Number	Description
AS-B	AS101-1	120 V ~ ±10%, 50/60 Hz ¹
	AS101-2	220 V ~ ±10%, 50/60 Hz ¹
Required Accessories	TA150-1	60 Gallon Oxygen Receiver
	KI410-1	Accessory Kit (interconnecting hoses/fittings and oxygen regulator)
Optional Accessories	TA150-2	60 Gallon Oxygen Receiver, CE-PED
	KI410-2	Accessory Kit (interconnecting hoses/fittings, oxygen regulator and oxygen filter)
	KI474-1	Accessory Kit (10 ft stainless braided oxygen hose - from oxygen regulator to use point)
	KI404-1	Accessory Kit (manual switch-over manifold for cylinder backup)
	AN021-1	Oxygen Analyzer (Maxtec Handi)
	AN005-1	Oxygen Analyzer (Maxtec Max O ₂ Plus)
	AN075-1	Oxygen Analyzer/Sensor (Maxtec Max O ₂ Plus)
Shipping Information		AS-B
		60 Gallon Oxygen Receiver
Class	92.5	70
Commodity Classification Number	8421.39.8040	7311.00.0000
Dimensions (L x W x H)	69 x 29 x 25 in (175 x 74 x 64 cm) with Accessory Kit(s), Crated 69 x 29 x 25 in (175 x 74 x 64 cm) with Accessory Kit(s) and CE Beds, Crated	30 x 28 x 56 in (76 x 71 x 142 cm)
Approximate Gross Weight	367 lb (166 kg) with Accessory Kit(s), Crated 389 lb (176 kg) with Accessory Kit(s) and CE Beds, Crated	174 lb (79 kg)

Warranty: 1 Year Parts and Factory Labor***

*** An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

¹ Specify oxygen flow and pressure at time of order.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.



© 2021 AirSep Corporation. All Rights Reserved.

AirSep reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence. Any rights expressly stated herein are reserved by us, as applicable.

BROWARD A&C
MEDICAL GAS SPECIALISTS

1533 SW 1st Way, Suite F19

Deerfield Beach, FL 33441

Office: 954-725-1470

Email: orders@medicalgassupplier.com