

PSA Oxygen Generator

AS-P



AirSep Alpha Series Oxygen Generators produce from 20 to 5,500 cubic feet of oxygen per hour at up to 95% oxygen concentration. When electricity and a source of compressed air is supplied, these dependable machines can provide oxygen for practically any application.

Features

- Produces oxygen from an independent compressed air source
- Microprocessor controlled
- Low operating cost
- Automatic and unattended operation
- Easy to install and maintain
- NEMA 4 Touchscreen control panel with integrated oxygen concentration monitor (available on some models)


Typical Applications

- Cutting/Brazing/Soldering
- Environmental Remediation
- Fish Farming
- Glass Work/Blowing
- Ozone (Generator) Feed Gas
- Thermal/Chemical Oxidation
- Waste/Water Treatment


Specifications

Product Flow	2,000 – 2,300 SCFH (52.58 – 60.46 Nm ³ /hr or 943 – 1,085 SLPM) ¹
Product Pressure	45 – 65 psig (310 – 448 kPa or 3.0 – 4.4 barg) ¹
Product Concentration	Up to 95%
Product Dew Point	-100°F (-73°C)
Dimensions (W x D x H) (Nominal)	85 x 64 x 111 in (216 x 163 x 282 cm)
Weight	6,250 lb (2,835 kg)
Physical Connections Compressed Air Inlet Product Gas Outlet	1½" FNPT ¾" FNPT
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 104°F (40°C)
Storage Temperature Humidity	-13°F (-25°C) to 131°F (55°C) 0-90% (non-condensing)
Feed Air Requirements	Flow Rate: <i>Refer to chart on reverse page.</i> Clean and Dry "Plant Air" (Class 5.6.4 per ISO 8573.1) Pressure: 90 psig (621 kPa or 6.2 barg) minimum Temperature: 122°F (50°C) maximum
Control Power Requirements (Single Phase)	120 V ~ ±10%, 50/60 Hz, 3.0 A or 220 V ~ ±10%, 50/60 Hz, 1.0 A
NRTL Certifications and Approvals	ASME Section VIII Division 1, CAN/CSA-C22.2 No. 61010-1-12, ANSI/UL Std. No. 61010-1:2012 (for 120 V configurations only)
660 Gallon Oxygen Receiver	
Dimensions (Dia. x H)	42 x 128 in (107 x 325 cm)
Weight	1,300 lb (590 kg)

¹ SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F (21°C) / Nm³ (Normal cubic meter) gas measured at 1 atmosphere and 32°F (0°C) / SLPM (Standard liters per minute) gas measured at 1 atmosphere and 70°F (21°C)

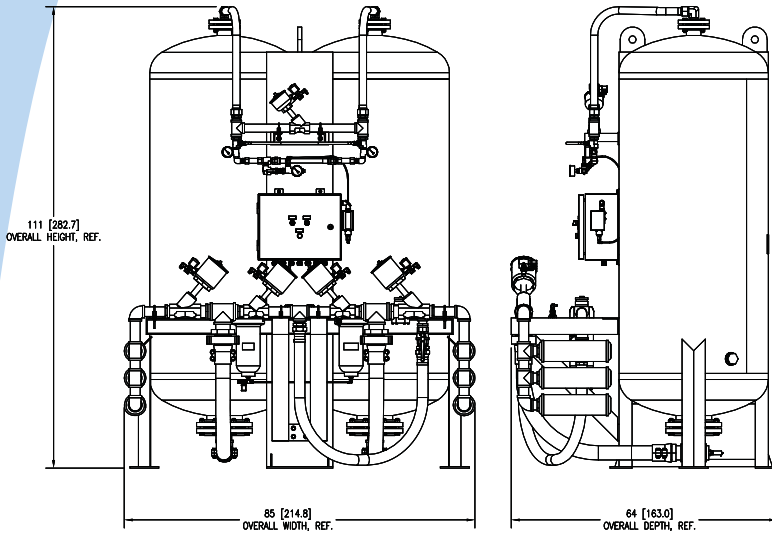

Note: All dimensions are nominal.

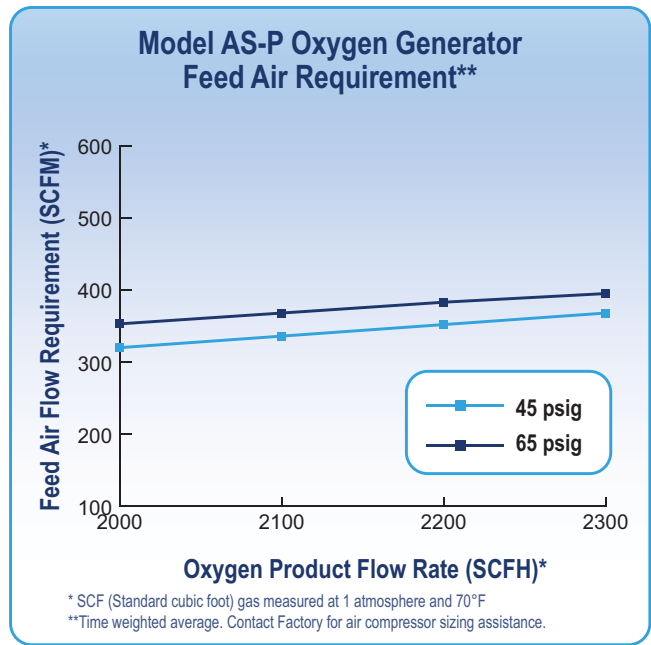

Ordering Information

Model	Part Number	Description	
AS-P	AS093-1	120 V ~ ±10%, 50/60 Hz ¹	
	AS093-2	220 V ~ ±10%, 50/60 Hz ¹	
	AS093-3	With NEMA 4 Pressure Switch, 120 V ~ ±10%, 50/60 Hz ¹	
	AS093-4	With NEMA 4 Pressure Switch, 220 V ~ ±10%, 50/60 Hz ¹	
	AS093-7	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 120 V ~ ±10%, 50/60 Hz ¹	
	AS093-8	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 220 V ~ ±10%, 50/60 Hz ¹	
	AS093-10	With NEMA 4 Pressure Switch/ Local Remote ON/OFF, 120 V ~ ±10%, 50/60 Hz ¹	
	AS093-11	With NEMA 4 Pressure Switch/ Local Remote ON/OFF, 220 V ~ ±10%, 50/60 Hz ¹	
	AS093-12	With oxygen concentration monitor (LED indicator), 120 V ~ ±10%, 50/60 Hz ¹	
	AS093-13	With oxygen concentration monitor (LED indicator), 220 V ~ ±10%, 50/60 Hz ¹	
	AS093-21	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 220 V ~ ±10%, 50/60 Hz ¹	
	Required Accessories	TA079-1	660 Gallon Oxygen Receiver
Optional Accessories	RG086-1	Regulator, Oxygen, 1" (30 – 80 psig, 2,000 – 5,000 SCFH)	
	KI375-8	Carbon Filter Add-On Kit	
	AN021-1	Oxygen Analyzer (Maxtec Handi)	
	AN005-1	Oxygen Analyzer (Maxtec Max O ₂ Plus)	
	AN075-1	Oxygen Analyzer/Sensor (Maxtec Max O ₂ Plus)	
Shipping Information		AS-P	660 Gallon Oxygen Receiver
Class		92.5	70
Commodity Classification Number		8421.39.8040	7311.00.0000
Dimensions (L x W x H)		114 x 88 x 72 in (290 x 224 x 183 cm) with Filter and Pallet	134 x 48 x 47 in (340 x 122 x 119 cm)
Approximate Gross Weight		6,710 lb (3,044 kg) with Filter and Pallet	1,520 lb (689 kg)

Warranty: 1 Year Parts and Factory Labor***

*** An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

¹ Specify oxygen flow and pressure at time of order.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.



© 2021 AirSep Corporation. All Rights Reserved.
 AirSep reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence. Any rights expressly stated herein are reserved by us, as applicable.



1533 SW 1st Way, Suite F19
 Deerfield Beach, FL 33441
 Office: 954-725-1470
 Email: orders@medicalgassupplier.com